

# NPN20-SD/S

## Normal Pressure Nozzle



### Description


The nozzle NPN20 is a lightweight nozzle for a varied field of applications. Designed for water and foam flow rates up to 1000 l/min at 10 bar, secures that high flowrate and gives an opportunity for spraying and jetting.

### Technical Specification

<b>Max. Flowrate</b>	500-750-1000/min @10 Bar (132-198-264 gpm at 150 psi)
<b>Max. Pressure</b>	16 Bar (232 psi)
<b>Inlet Size</b>	2" BSP Female Threat
<b>Material / Coating</b>	Lightweight Alloy Aluminum / Hard Anodized

\*: Products marked with this symbol are optional and may be subject to additional charges.

### Dimensions

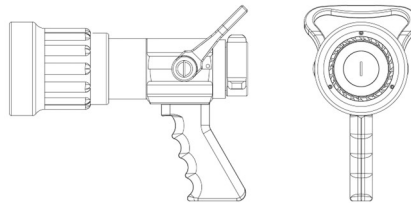

### Contact

GFF Yangın ve Güvenlik Sistemleri San. Ve Tic. Ltd. Şti.  
Cevizli Mah. Bayraktar Sk. No:1/3 Nursanlar 4 Plaza  
34865 Kartal, İstanbul / TÜRKİYE  
Tel: +90 (216) 766 60 27  
Fax: +90 (216) 766 60 27  
info@gff.com.tr

[www.gff.com.tr](http://www.gff.com.tr)