

NPN25-SD/S

Normal Pressure Nozzle



Description


The nozzle NPN25 is a lightweight nozzle for a varied field of applications. Designed for water and foam flow rates up to 1250 l/min at 10 bar, secures that high flowrate and gives an opportunity for spraying and jetting.

Technical Specification

Max. Flowrate	750-1000-1250/min @10 Bar (198-312-330 gpm at 150 psi)
Max. Pressure	16 Bar (232 psi)
Inlet Size	2½" BSP Female Threat
Material / Coating	Lightweight Alloy Aluminum / Hard Anodized

*: Products marked with this symbol are optional and may be subject to additional charges.

Dimensions

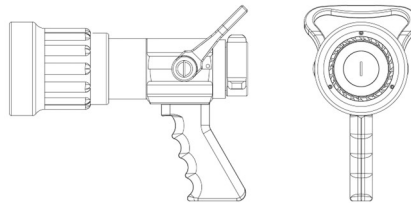

Contact

GFF Yangın ve Güvenlik Sistemleri San. Ve Tic. Ltd. Şti.
Cevizli Mah. Bayraktar Sk. No:1/3 Nursanlar 4 Plaza
34865 Kartal, İstanbul / TÜRKİYE
Tel: +90 (216) 766 60 27
Fax: +90 (216) 766 60 27
info@gff.com.tr

www.gff.com.tr