

HPN10-SD/T

High Pressure Nozzle



Description


The nozzle HPN10 is a lightweight nozzle for a varied field of applications. Designed for water and foam flow rates up to 150 l/min at 40 bar, secures that extremely tiny droplets and gives an opportunity for spraying and jetting.

Technical Specification

Max. Flowrate	150 l/min @40 Bar (40 gpm at 580 psi)
Max. Pressure	100 Bar (232 psi)
Inlet Size	1" BSP Female Threat M30x1,5
Material / Coating	Lightweight Alloy Aluminum / Hard Anodized

*: Products marked with this symbol are optional and may be subject to additional charges.

Dimensions

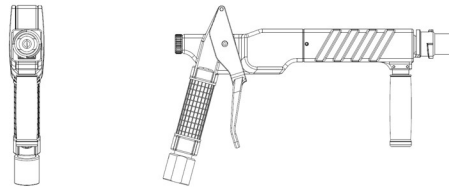

Contact

GFF Yangın ve Güvenlik Sistemleri San. Ve Tic. Ltd. Şti.
Cevizli Mah. Bayraktar Sk. No:1/3 Nursanlar 4 Plaza
34865 Kartal, İstanbul / TÜRKİYE
Tel: +90 (216) 766 60 27
Fax: +90 (216) 766 60 27
info@gff.com.tr